

2100SBC-25

25 PAIR - INDOOR BET - BIX/15' 24 AWG CABLE STUB - COVER & SPLICE CHAM-

Product Specifications


UL 497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Loaded and Unloaded Models are "Buy America Act" Approved.

These heavy gauge steel BIX block building entrance terminals feature the BIX (MOX) brand connector and external ground connectors that accept 6 to 14 gauge ground wire. The BIX connector can terminate 22 - 26 gauge wire and accepts the QTBIX22A test shoe. This line is designed to exceed the requirements set forth in the Underwriters Laboratories' (UL, cUL) and the Canadian Standard Association (CSA). The units have an internal fuse link and use industry standard 5-pin protection modules.

Features & Benefits

- 16AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Equipped with Heavy Duty Strain Relief and Encapsulated Cable Connector

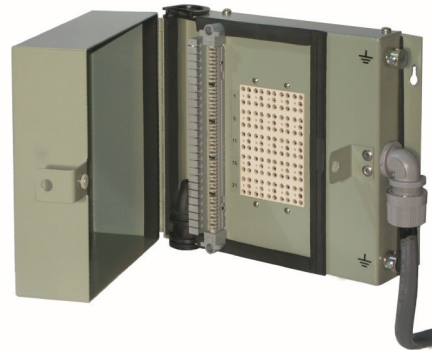

2100SBC-25

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
2100SBC-25	206006A15	25	BIX	Cable	8.25 x 10.50 x 4.00	10

Cable Type: 24AWG 15' Shielded CMR Input 0.38 dia o.d.

Circa Telecom, Inc © 2011 - Version 1.04

8270 Woodland Center Blvd - Tampa, FL 33614
Phone 800.783.6556 - Fax 813.676.2060 - Email circatech@circa telecom.com - www.circa telecom.com



Building Entrance Terminals

INDOOR - BIX CONNECTOR SERIES - BET



Underwriters
Laboratories


2100SBC-25

25 PAIR - INDOOR BET - BIX/15' 24 AWG CABLE STUB - COVER & SPLICE CHAM-

Physical Dimensions

UL 497 Primary Protector for Communication Circuits

8.25 x 10.50 x 4.00
(H" x W" x D")

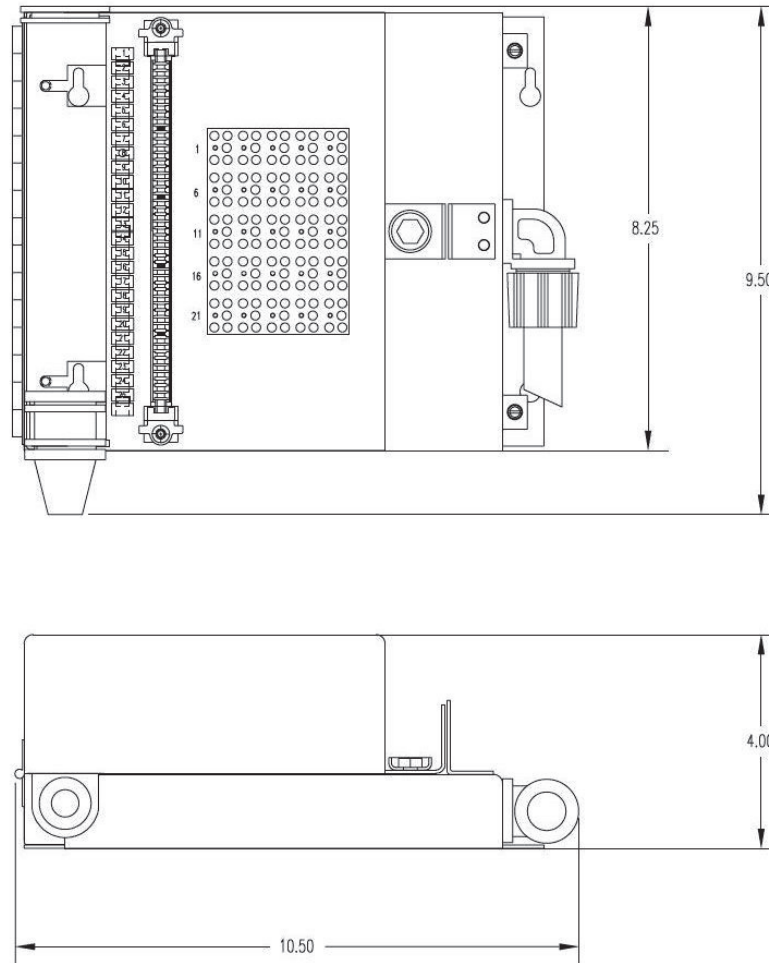

Notes

Cable Type: 24AWG 15' Shielded CMR Input 0.38 dia o.d.

Indoor Wall Mount

Canadian version equipped with 15' 24AWG Unshielded Output Cable

BIX Connector Accepts 22 - 26 AWG Wire