

## **Building Entrance Terminals**

**RACK MOUNT PROTECTOR SERIES - RMP** 

## 1880ENA1/NSC-200

200 PAIR - INDOOR BET - 110/110 - WALL or 19" RACK MOUNT



### **Product Specifications**

#### **UL 497 Primary Protector for Communication Circuits**

NAFTA Country of Origin: CANADA - All Loaded and Unloaded Models are "Buy America Act" Approved.

16AWG Powder Coated Steel Construction

Equipped with an Internal 26AWG Fuse Link


External Ground Connectors Accept 6 - 14 AWG Wire

Industry Standard 5 Pin Design

Exceeds UL497 Primary Protection Standards

Wall or 19" Rack Mountable

110 Connector Accepts 22 - 26 AWG Wire

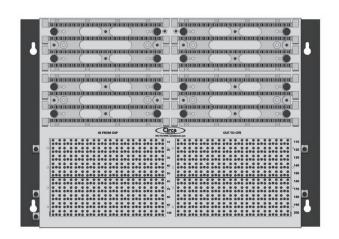

## **Ordering Information**

#### 1880ENA1/NSC-200

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880ENA1/NSC-200	331901	200	110	110	14.00 x 20.00 x 4.99	21
1880ENA1/NSC-200 R/C	331902	200	110	110	14.00 x 20.00 x 4.99	21
1880ECA1/NSC-200 (Cover)	331903	200	110	110	14.00 x 20.00 x 4.99	26
1880ECA1/NSC-200 R/C (Cover)	331904	200	110	110	14.00 x 20.00 x 4.99	26

#### **Notes**

110 Connector Accepts 22 - 26 AWG Wire

Installation: Wall or 19" Rack Mountable

R/C = Reverse Configuration for opposite side of rack

1880ECA1 Series equipped with cover

Circa Telecom, Inc ® 2016 - Version 1.04



# **Building Entrance Terminals**

**RACK MOUNT PROTECTOR SERIES - RMP** 

## 1880ENA1/NSC-200


200 PAIR - INDOOR BET - 110/110 - WALL or 19" RACK MOUNT - NO COVER





## **Physical Dimensions**

**UL 497 Primary Protector for Communication Circuits** 

14.00 x 20.00 x 6.06 (H" x W" x D")

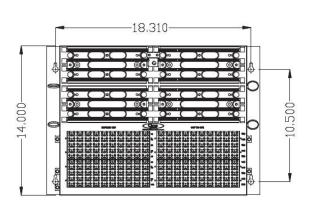

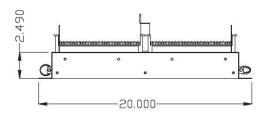

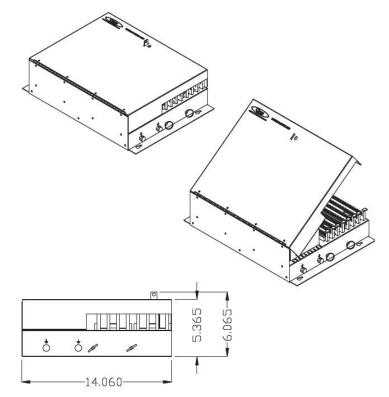

#### **Notes**

110 Connector Accepts 22 - 26 AWG Wire

Installation: Wall or 19" Rack Mountable

R/C = Reverse Configuration for opposite side of rack

1880ECA1 Series equipped with cover

Circa Telecom, Inc ® 2016 - Version 1.04