

Building Entrance Terminals

INDOOR - 110 CONNECTOR SERIES - BET

1880ENA1/NSC-50

50 PAIR - INDOOR BET - 110/110 - NO COVER

Product Specifications


UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

These 16 AWG steel building entrance terminals feature an industry standard 110 - style connector for both the input and output terminals. Also included are multiple external and internal ground lugs. UL approved standard on all terminals. Standard 5-pin protection modules, available in gas tube, solid state and hybrid versions, can be purchased separately. Call for more detailed information on RDUP/RUS-listed units.

Features & Benefits

- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- 110 Connector Accepts 22 26 AWG Wire

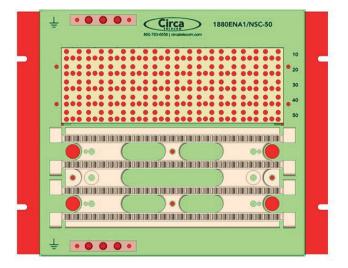

1880ENA1/NSC-

Ordering	Information
----------	-------------

Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
315015	50	110	110	7.18 x 10.75 x 5.45	9
Version 1.04 827	0 Woodland Ce	nter Blvd - T	ampa. Fl 33614		
	315015 Version 1.04	Count 315015 50 Version 1.04	Count	Count 1 315015 50 110 110	Count (H" x W" x D") 315015 50 110 110 7.18 x 10.75 x 5.45 Version 1.04 Version 1.04 Version 1.04 Version 1.04





Building Entrance Terminals

INDOOR - 110 CONNECTOR SERIES - BET

1880ENA1/NSC-50


50 PAIR - INDOOR BET - 110/110 - NO COVER


Physical Dimensions

UL497 Primary Protector for Communication Circuits

7.18 x 10.75 x 5.45 (H" x W" x D")

Underwriters Laboratories

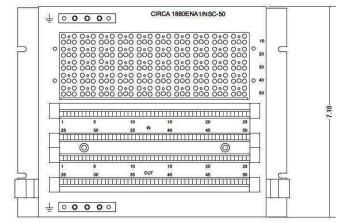

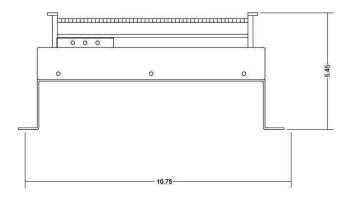

Notes

Installation:

Previous Model Number : 1880ENA1/NSC-50G

Indoor Wall Mount

Circa Telecom, Inc ® 2016 - Version 1.04