

1890ECS1-100

100 PAIR - INDOOR BET - 710/66 - COVER & SPLICE CHAMBER



Product Specifications

UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

These 16 AWG steel building entrance terminals feature a 710 style connector for use in specialized OSP installations including military, healthcare and educational applications. Also included are multiple external and internal ground lugs as well as a splice chamber. UL Approval standard on all terminals. Standard 5-pin protector modules, available in gas tube and solid state versions, are sold separately. Call for more detailed information on RDUP/RUS-listed units.

Features & Benefits

- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Stackable with Connection Grommets Included
- Input/output Connectors Accept 22 - 26 AWG Wire



1890ECS1-100

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1890ECS1-100	135032	100	710	66	12.00 x 19.00 x 4.50	26



Building Entrance Terminals

INDOOR - 110 CONNECTOR SERIES - BET

1890ECS1-100

100 PAIR - INDOOR BET - 710/66 - COVER & SPLICE CHAMBER




Underwriters
Laboratories

Physical Dimensions

UL497 Primary Protector for Communication Circuits

12.00 x 19.00 x 4.50
(H" x W" x D")

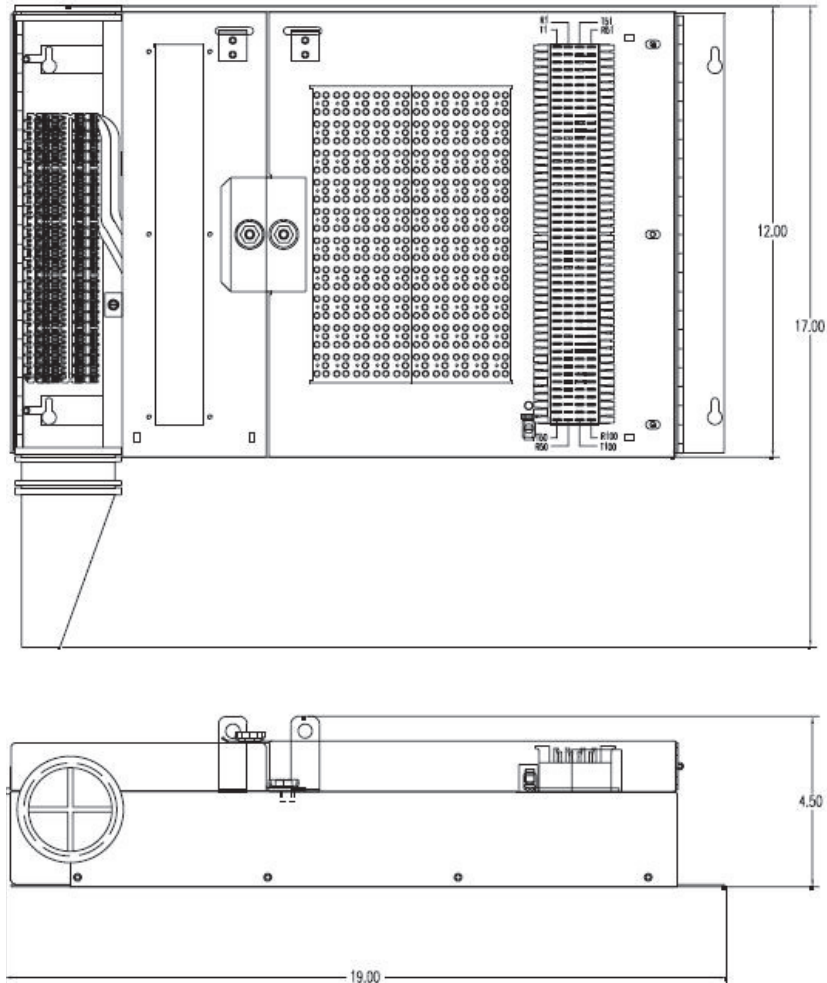

Notes

Installation:

Indoor Wall Mount

RUS Approved Material - 2011 Edition RUS Publication 344-2 (Section 4.1.2 and 4.2)

Circa Telecom, Inc © 2016 - Version 1.04

8270 Woodland Center Blvd - Tampa, FL 33614
Phone 800.783.6556 - Fax 813.676.2060 - Email circatech@circa telecom.com - www.circa telecom.com