



Building Entrance Terminals

INDOOR - 110 CONECTOR SERIES - BET



1880B1-50A

50 PAIR - INDOOR BET - 25' CABLE STUB/110 - NO COVER

Product Specifications


UL 497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Loaded and Unloaded Models are "Buy America Act" Approved.

Circa's cable stub units offer the user a variety of installation and splicing options depending on application specific requirements. Custom cable stub lengths are available upon request. Standard stub length on the 1900 Series, stub to stub, is 25 feet. These units are also available with stubs in/out of equal length in 50 or 100 feet. The 1900A1-100K model can also be ordered with both stubs coming from the bottom or top. The units have an internal fuse link and use industry standard 5-pin protection modules.

Features & Benefits

- 16AWG Powder Coated Steel Construction
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Equipped with Heavy Duty Strain Relief and Encapsulated Cable Connector
- Custom Cable Lengths Available in 25' Increments

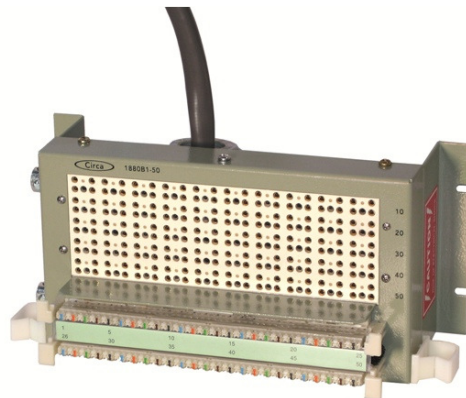

1880B1-50A

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880B1-50A	313014A25	50	Cable	110	5.38 x 10.75 x 4.75	10

Cable Type: 24AWG 25' Shielded CMR

Circa Telecom, Inc © 2011 - Version 1.04

8270 Woodland Center Blvd - Tampa, FL 33614
Phone 800.783.6556 - Fax 813.676.2060 - Email circatech@circa telecom.com - www.circa telecom.com



Building Entrance Terminals

INDOOR - 110 CONECTOR SERIES - BET




1880B1-50A

50 PAIR - INDOOR BET - 25' CABLE STUB/110 - NO COVER

Physical Dimensions

UL 497 Primary Protector for Communication Circuits

5.38 x 10.75 x 4.75
(H" x W" x D")

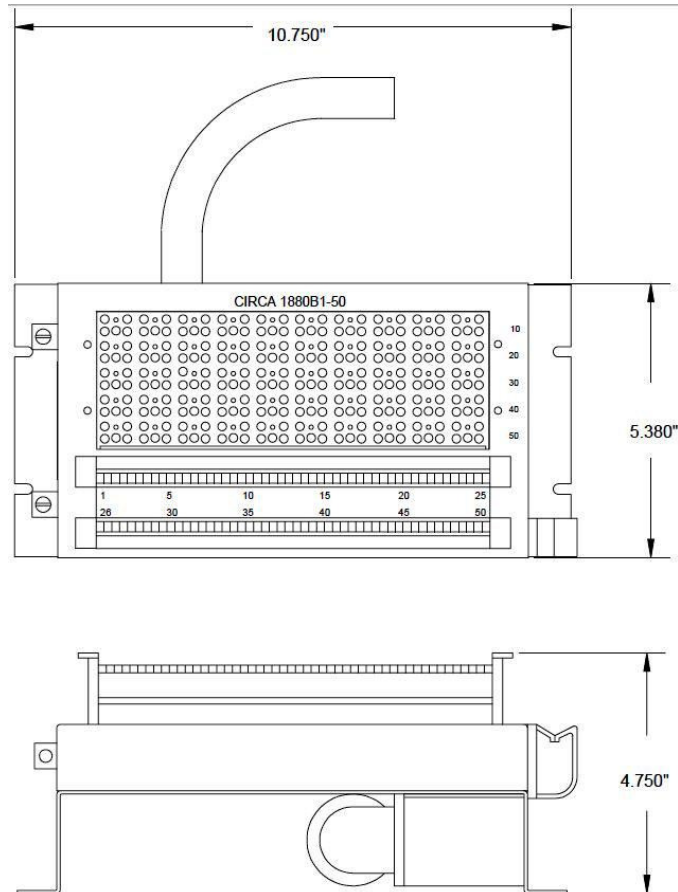

Notes

Cable Type: 24AWG 25' Shielded CMR

Indoor Wall Mount

Custom cable lengths available in 25' increments

110 Connector Accepts 22 - 26 AWG Wire