

2100SB-100

100 PAIR - INDOOR BET - BIX/BIX - COVER & SPLICE CHAMBER



Product Specifications


UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

These 16 AWG steel building entrance terminals feature the BIX style connector and external ground connectors that accept 6 to 14 AWG ground wire. The BIX connector can terminate 22-26 AWG wire and excepts the QTBIX22A test shoe. This line is designed to exceed the requirements set forth in Underwriters Laboratories' UL497 (UL, cUL) and the Canadian Standards Association (CSA). The units have an internal fuse link and use industry standard 5-pin protection modules which are sold separately.

Features & Benefits

- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Stackable with Connection Grommets Included
- BIX Connector Accepts 22 - 26 AWG Wire

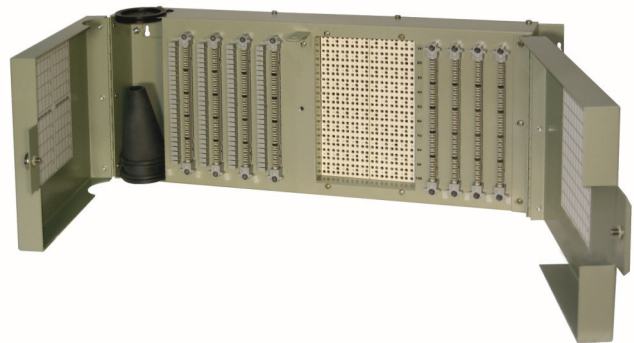

2100SB-100

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
2100SB-100	231040	100	BIX	BIX	9.20 x 24.25 x 4.50	21



Building Entrance Terminals

INDOOR - 110 CONNECTOR SERIES - BET

2100SB-100

100 PAIR - INDOOR BET - BIX/BIX - COVER & SPLICE CHAMBER




Underwriters
Laboratories

Physical Dimensions

UL497 Primary Protector for Communication Circuits

9.20 x 24.25 x 4.50
(H" x W" x D")

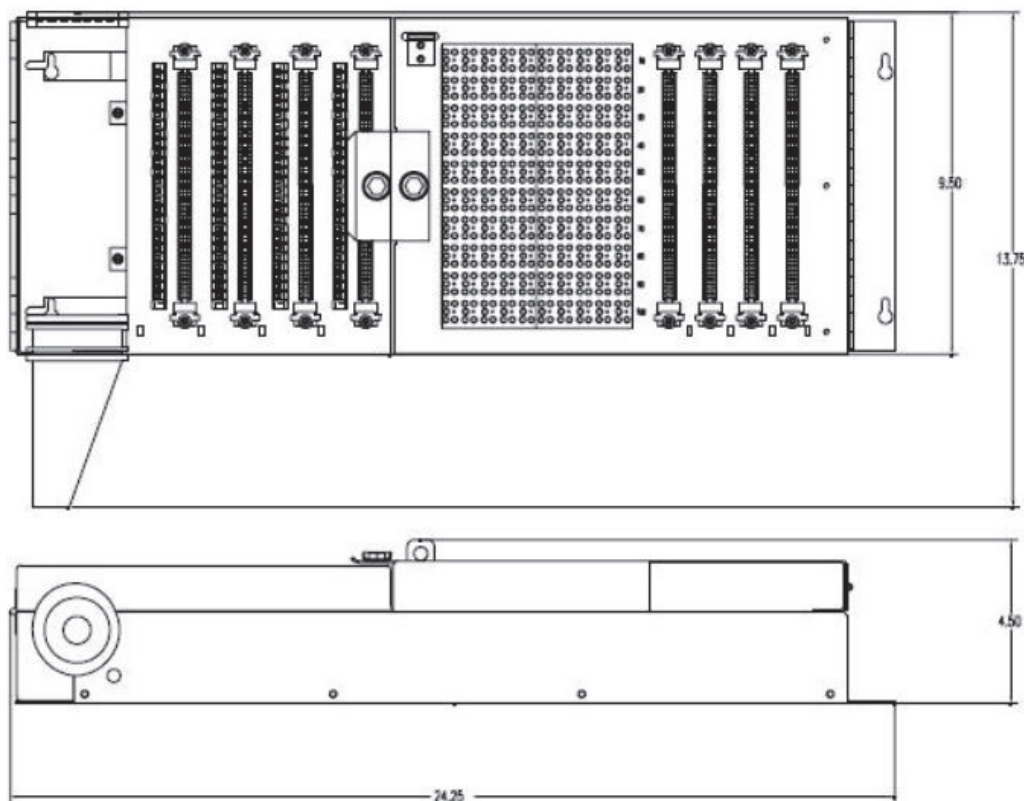

Notes

Installation:

Previous Model Number : 2250SBP-100

Wall or 23" Rack Mount