

1880ENA1/NSC-12e

12 PAIR - CAT5e - INDOOR BET - 110/110 - NO COVER



Product Specifications


UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

The Enhanced Series is built to be a universal protector with throughput of up to 1Gbps and clamping speeds of 2-3 nanoseconds. Available in 66 block, 110 connector or BIX. Select the right voltage and protect everything from VOIP to networks, digital phones to VDSL2.

Features & Benefits

- Certified Category 5e
- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- 110 Connector Accepts 22 - 26 AWG Solid or Stranded Copper Wire

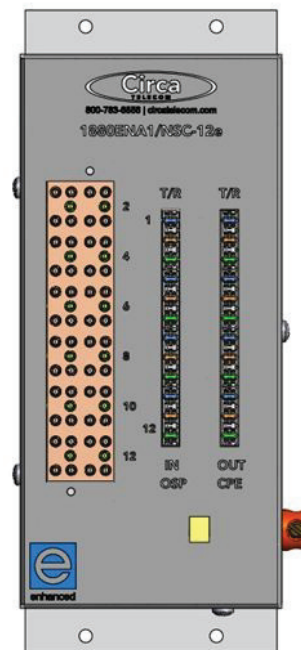

1880ENA1/NSC-

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880ENA1/NSC-12e	314114	12	110	110	9.85 x 4.45 x 1.77	2.5

1880ENA1/NSC-12e


12 PAIR - CAT5e - INDOOR BET - 110/110 - NO COVER



Physical Dimensions

UL497 Primary Protector for Communication Circuits

9.85 x 4.45 x 1.77
(H" x W" x D")

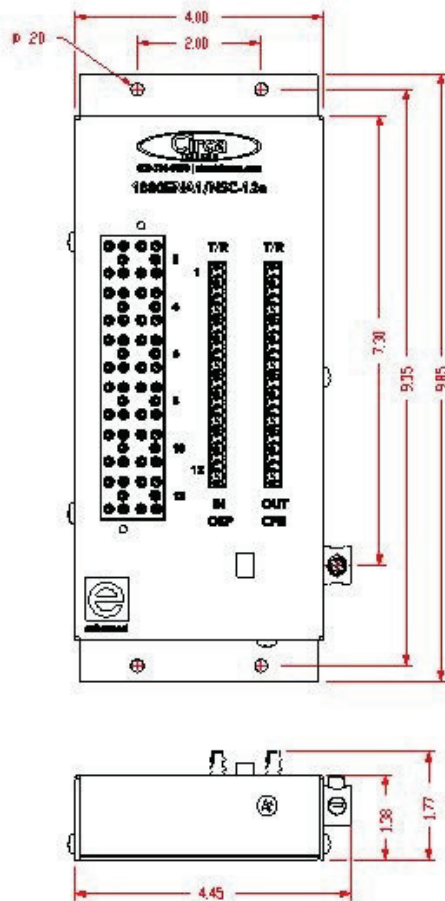

Notes

Installation:

When used in conjunction with the Circa Telecom CAT5e/Hybrid Module Series