



## Building Entrance Terminals

HIGH SPEED DATA - INDOOR - 110 CONNECTOR SERIES



### 1880ENA1/NSC-25e

25 PAIR - CAT5e - INDOOR BET - 110/110 - NO COVER

#### Product Specifications


### UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

The Enhanced Series is built to be a universal protector with throughput of up to 1Gbps and clamping speeds of 2-3 nanoseconds. Available in 66 block, 110 connector or BIX. Select the right voltage and protect everything from VOIP to networks, digital phones to VDSL2.

## Features & Benefits

- Certified Category 5e
- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- 110 Connector Accepts 22 - 26 AWG Solid or Stranded Copper Wire

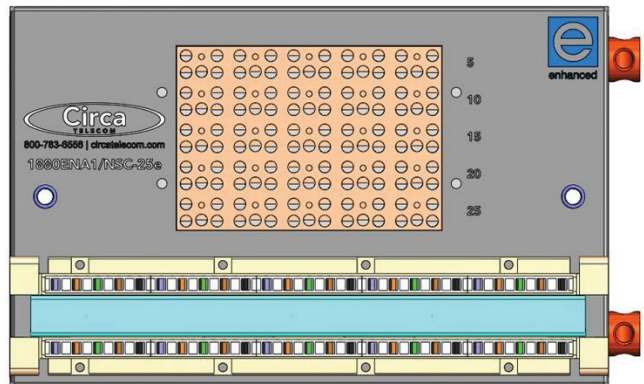

1880ENA1/NSC-

#### Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880ENA1/NSC-25e	315115	25	110	110	5.38 x 8.5 x 2.78	6



## Building Entrance Terminals

HIGH SPEED DATA - INDOOR - 110 CONNECTOR SERIES




### 1880ENA1/NSC-25e

25 PAIR - CAT5e - INDOOR BET - 110/110 - NO COVER

#### Physical Dimensions

#### UL497 Primary Protector for Communication Circuits

5.38 x 8.5 x 2.78  
(H" x W" x D")

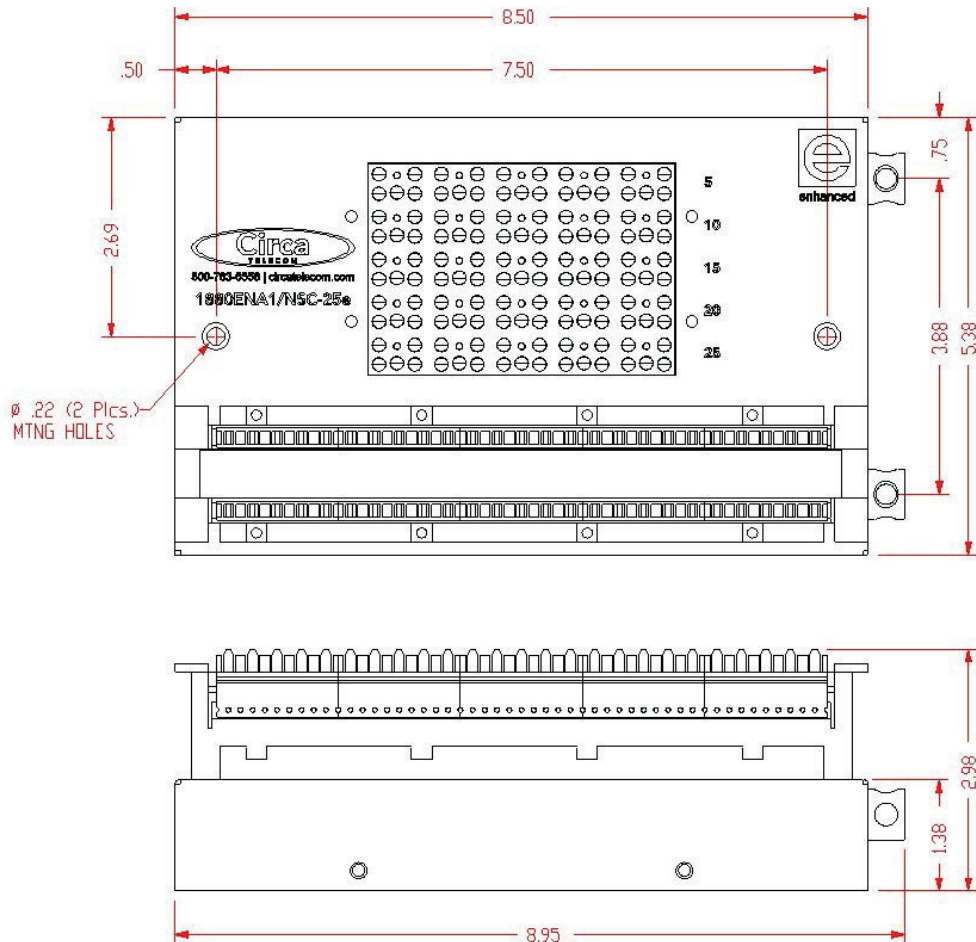

#### Notes

Installation:

When used in conjunction with the Circa Telecom CAT5e/Hybrid Module Series